

# MegaPure™ 100SS

## Chemical Distribution System


- » Economical
- » Space-efficient design
- » Single pass solvent filtration
- » Pulsation dampening of pump
- » Non-intrusive empty drum detection
- » Stainless steel cabinet with wire reinforced glass doors
- » Meets Class 1, Division II standards



### System Features


The MegaFlow 100SS Chemical Distribution System with pulsation dampener provides single pass filtration at  $0.05\mu$  for solvents with a space efficient footprint. It is generally configured for one or two 55 gallon feed drums. Advanced microprocessor PLC-based controls are isolated in a separate nitrogen purged compartment. PLC network communication enhances the system's user-friendly operator interface panel.

- Excess flow indication and shutdown
- Photoelectric leak detection and alarm
- Manual N2 pump and filter purging
- Recirculating DI spray gun
- Cabinet door interlocks
- Teflon™ pump with pulsation dampening
- Manual valve isolation of inlet and outlet lines and pump
- Non-intrusive drum empty detection
- Cartridge filter (10")
- Class 1, Division II approved



### Options

- Sample port
- Dual supply source with auto-changeover
- High capacity (HC)
- Redundant pump
- Redundant filter (standard on HC)
- Drum cabinet
- CE Mark 220 V, 50Hz
- Particle counter connection
- Custom configuration and integration

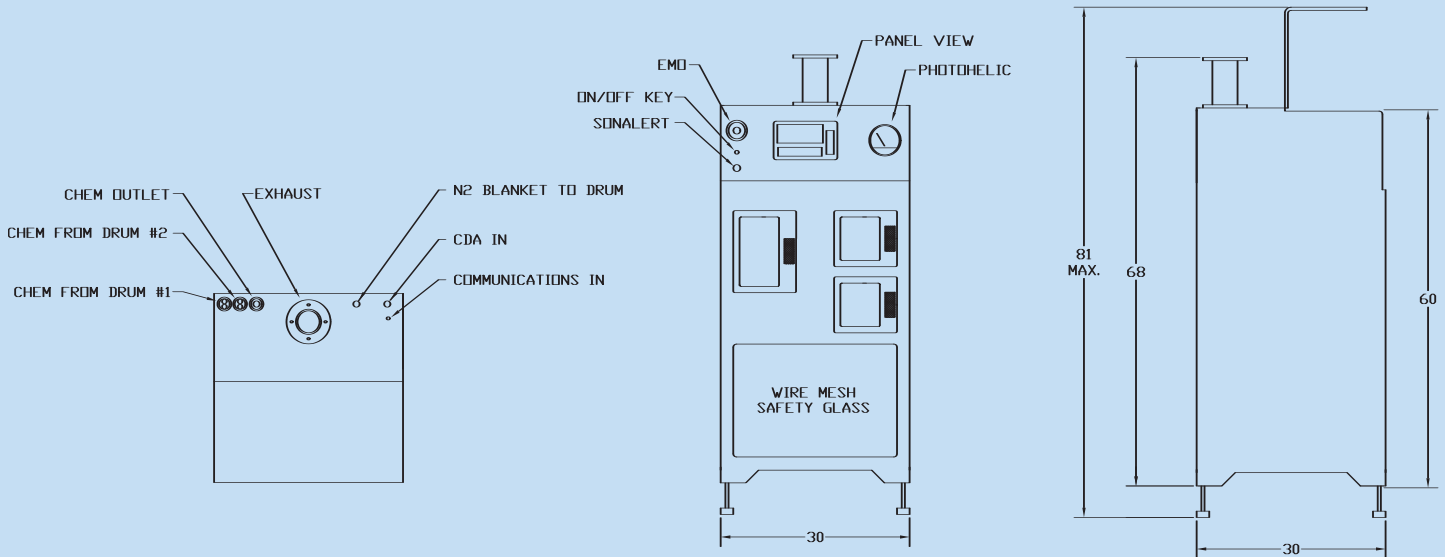

### Reliability

- > 2,500 hrs MTBF
- > 1,250 hrs MTBA
- < 2 hrs MTTR
- > 95% availability

### Performance

Flow rate: 2.5 GPM @ 25 psi (Regular Flow)  
 6 GPM @ 20 psi HC (High Capacity)  
 (DI water @ Exit of CDU outlet)

### Utilities for testing

Semiconductor grade nitrogen (99.999%)  
 Clean dry air

### Controls

- Connectivity to system PLCs via DH+ network
- Allen-Bradley monitoring system
- Local and remote EMO capability
- Dry contacts (chemical request/chemical available)

Model	MF 100SS	MF 100SS HC
Application	Solvents	Solvents
Flowpath	3/4"	1"
Dispense rate	2.5 GPM @ 25 psi	6 GPM @ 20 psi
Cabinet Materials	Stainless steel (304)	Stainless steel (304)
Footprint	30" x 30" x 71"	36" x 36" x 85"
Filter Housing	10" Cartridge filter	10" Cartridge filter(s)
Leak detection	Yes	Yes

Facility requirements	MP 100SS	Connection Type
N <sub>2</sub>	2 SCFM, 90 psi 3 SCFM, 90 psi (HC)	3/8" SS Swagelok
CDA	10 SCFM, 80 psi 12 SCFM, 80 psi (HC)	3/8" SS Swagelok 1/2" SS Swagelok (HC)
Exhaust	75 SCFM (dist.) 2" H <sub>2</sub> O	3" Pipe flange
Process drain	30 psi, 5 GPM	3/4" FNPT polypro
Power	120 VAC, 15 AMP service	3/4" Conduit
Cabinet drain	Gravity	3/4" FNPT SS



CELERITY, INC.  
 1315 West Drivers Way  
 Tempe, Arizona 85284  
 Telephone 480.763.2200  
 Facsimile 480.763.2218  
 www.celerity.net



Celerity and MegaPure are trademarks of Celerity, Inc. All other product or service names mentioned in this document may be trademarks of the companies with which they are associated. System descriptions are typical and subject to change without notice.