

DX-5 Series

Digital Control System

Applications

- » General process control
- » OEM instrumentation
- » R&D bench control
- » Lab bench control
- » Testing facilities



Features at a glance

- Controls five mass flow controllers or meters and one pressure controller
- Depicts set point and actual readings
- One pressure transducer input
- Built-in program alarms
- Flow set entered in percentage of full scale
- Easy to use touch screen display
- Remote monitoring via RS-232
- Communication interface to LabView® and other GUI's
- 100/120/220/240VAC—47 to 63 Hz
- 19" rack mount capability

Performance advantage

The model DX-5 digital control system is capable of controlling up to five mass flow controllers or meters and one pressure controller. Setpoint and output are clearly shown as a percentage of full scale on the blue/white touch screen display.

Proven design and performance

• Design flexibility

User friendly menu screens enable configuration on each channel. The DX-5 has a unique integrated pressure control loop



which can be used with a Unit pressure controller to maintain constant pressure in any flow system. Each channel can also be configured and monitored via a remote RS232 communication interface using a simplified ASCII command set. This highly versatile system provides far greater flexibility than conventional power supplies offered in the industry today. Refine, monitor, or automate any mass flow process with Unit's easy to use digital control system.

• Remote monitoring and control

Remote monitoring and control via a RS232 cable input. Through a predefined command set the DX-5 is capable of being operated remotely through industry standard SCADA or laboratory GUI interfaces such as LabView.

The best service and support in the industry

Celerity is unmatched in the industry for service and support. We have worldwide service locations with calibration, application support, and repair capabilities, operating 24 hours a day, 7 days a week. Celerity's website also provides updated application and technical support.

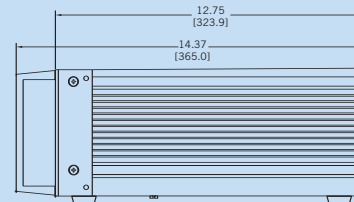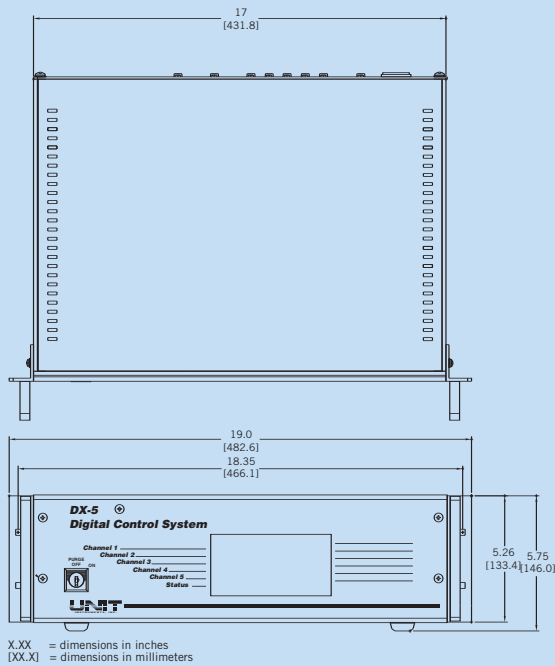

DX-5 Series Product Configuration

DX-5	Digital Control System
E	Cardedge MFC Connector Cable 0-5 VDC—Standard
U	15 Pin "D" MFC Connector Cable (UDU15) 0-5 VDC—Standard
T	9 Pin "D" MFC Connector Cable (UDU9) Unit 0-5 VDC
L	Local Control
R	Remote Control—Generic Serial Output
6	7 Feet of Cable Standard—Qty. 5 Cables Included
12	12 Feet of Cable
20	20 Feet of Cable
30	30 Feet of Cable

Example:

DX-5 U L 6

Note:
OEM Packaging Available—Consult Factory



CELERITY, INC.
22600 Savi Ranch Parkway
Yorba Linda, California 92887
Telephone 714.279.3500
Facsimile 714.921.0804
www.celerity.net



For technical assistance, contact Celerity Applications Engineering at 714.279.3500.

Celerity, Unit, MultiFlo, IsoSensor, and CrossChek are trademarks of Celerity, Inc. All other product or service names mentioned in this document may be trademarks of the companies with which they are associated. System descriptions are typical and subject to change without notice.