


REVISIONS						
REV.	DESCRIPTION	EO#	DATE	ENG.	Q.L.T.Y.	MFG.
A	INITIAL RELEASE	4625	06-30-99	T.M.	K.P.	K.P.
B	ADDED "WIDTH" COLUMN TO TABLE	5268	10-26-00	W.S.V.	M.P.I.	D.M.

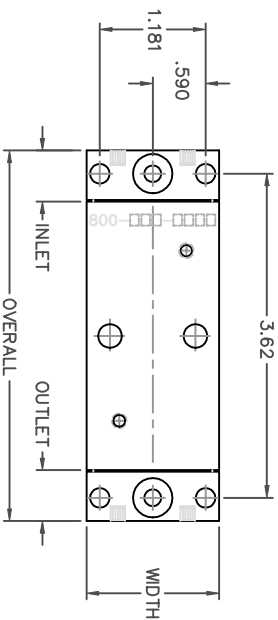

FITTING TYPE	CODE	OVERALL	INLET	OUTLET	WIDTH	MODEL(S)
1/4 VCR MALE	4R	4.88	.94	.94	1.48	ALL
1/4 SW MALE	4S	4.44	.72	.72	1.48	
1/4 VCO MALE	40	4.56	.78	.78	1.48	
1/8 SW MALE	8S	4.32	.66	.66	1.48	
3/8 SW MALE	3S	4.56	.78	.78	1.48	8100U
DOWNPORT "C" SEAL	DC	4.14	.57	.57	1.48	
DOWNPORT C" BORE	DB	4.14	.57	.57	1.48	
DOWNPORT "W" SEAL	DW	4.14	.57	.57	1.51	

PART NO.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	 CELERITY™ 22600 Sant Ranch Pkwy, Yorba Linda, CA 92887
ACAD NO.	DECIMALS ANGLES .XXX .01 .XXX ± 1°	
DB1660U	BREAK SHARP EDGES N/A	
USED ON	DRAWN: KEVIN N. DATE: 05-18-99	

UFC-1660U/8100U/8160U
 PRESSURE BUFFERED

